


Skylux® Window: The superinsulating frame

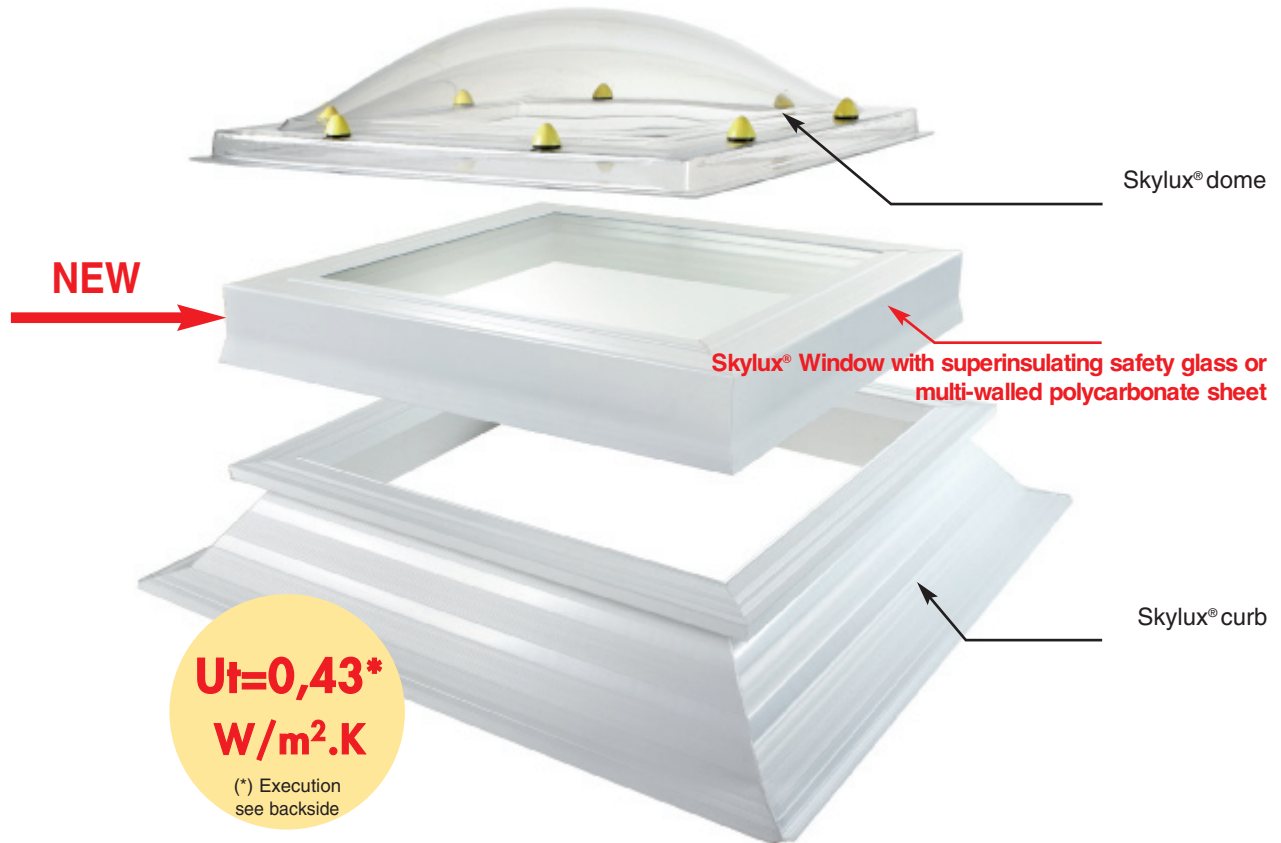

Your advantages

Can be used with the full Skylux® range

The Skylux® Window can be used for refurbishment and/or in new situations. The Skylux® Window is compatible with every dome and curb of the Skylux® range (consult the available sizes at the back) : from the single-walled to the 4-walled or the superinsulating EP dome. This way, you can determine yourself the insulation value Ut to 0,43 W/m².K. The handy "refurbishment" curb 35/30 gives extra insulation and makes it possible to be built over the existing curb without any demolition. An important asset to realise a perfect roof refurbishment.

Aesthetic solution


The Skylux® Window comes in a fixed or openable version with an invisible in-built motor. The opening can be set continuously to 240 mm with the delivered remote control.

Numerous possibilities

Led lights : your Skylux® dome provides you natural daylight during the day, where at night, you can enjoy the economical LED lights, installed in the roof opening or the curb.
Insect screen: keeps annoying insects outside.

Types

1/ Fixed system

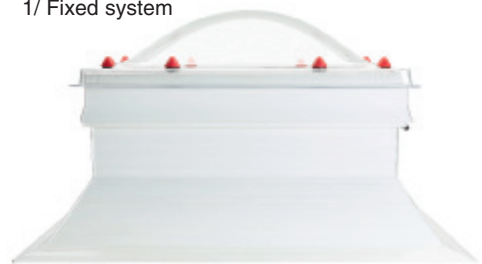

2/ Electric openable system + remote control



Contact us at info@agp.be for more information

www.skylux.be





General product description

The Skylux® Window consists of following parts:

1. an insulating PVC frame (fixed or openable) with superinsulating HR++ safety glazing
2. an in-built single or double chain motor 240 mm opening (°)
3. a remote control with holder (°)

(°) only in case of electric openable Skylux® Window

Extra:

4. a dome of your choice
5. a curb of your choice

Possibilities with curbs

		CURBS PVC				CURBS POLYESTER	
		With pvc 16/20 curb	With pvc 16/00 curb	With pvc 30/20 curb	With pvc 35/30 curb	With curb D30 EP60	With curb D30 EP100
B	C	C	C	C	C	C	C
DAYLIGHT SIZE	ROOF OPENING	ROOF OPENING	ROOF OPENING	ROOF OPENING	ROOF OPENING	ROOF OPENING	ROOF OPENING
□	60 x 60	80 x 80	60 x 60	80 x 80	90 x 90	80 x 80	80 x 80
	70 x 70	90 x 90	70 x 70	90 x 90	100 x 100	90 x 90	90 x 90
	80 x 80	100 x 100	80 x 80	100 x 100	110 x 110	100 x 100	100 x 100
	90 x 90	110 x 110	90 x 90	110 x 110	120 x 120	110 x 110	110 x 110
	100 x 100	120 x 120	100 x 100	120 x 120	130 x 130	120 x 120	120 x 120
	120 x 120	140 x 140	120 x 120	140 x 140	150 x 150	140 x 140	140 x 140
	130 x 130	150 x 150	130 x 130	150 x 150	160 x 160	150 x 150	150 x 150
	140 x 140	160 x 160	140 x 140	160 x 160	170 x 170	160 x 160	160 x 160
□	40 x 70	60 x 90	40 x 70	60 x 90		60 x 90	60 x 90
	60 x 90	80 x 110	60 x 90	80 x 110	90 x 120	80 x 110	80 x 110
	100 x 150	120 x 170	100 x 150	120 x 170	130 x 180	120 x 170	120 x 170

Determine yourself the U value

Ug-value double glazing 33.1/15/4 (1,1 W/m²K) or polycarbonate with dome

type of dome	single-walled	2-walled	3-walled	4-walled (*)	Energy Profit 10 mm	Energy Profit 16 mm (*)
Ug-value with glas	0,95	0,81	0,71	0,63	0,62	0,51
Ug-value with PC	1,23	1,01	0,86	0,74	0,72	0,58

Ut-value Skylux Window glas with curb (W/m²K)

dome \ curb	single-walled	2-walled	3-walled	4-walled (*)	Energy Profit 10 mm	Energy Profit 16 mm (*)
PVC 16-20	1,48	1,41	1,37	1,33	1,32	1,27
PVC 16-00	1,00	0,93	0,88	0,83	0,83	0,77
PVC 30-20	1,00	0,95	0,91	0,88	0,88	0,84
PVC 35-30	0,93	0,89	0,86	0,84	0,83	0,80
D30 EP60	0,67	0,61	0,58	0,55	0,54	0,50
D30 EP100	0,60	0,54	0,51	0,48	0,47	0,43

(*) only for available sizes (consult the Skylux® price list)

The U values are according European and ISO norms.

DEALER

